Managament solutions for your hot dip galvanizing lines

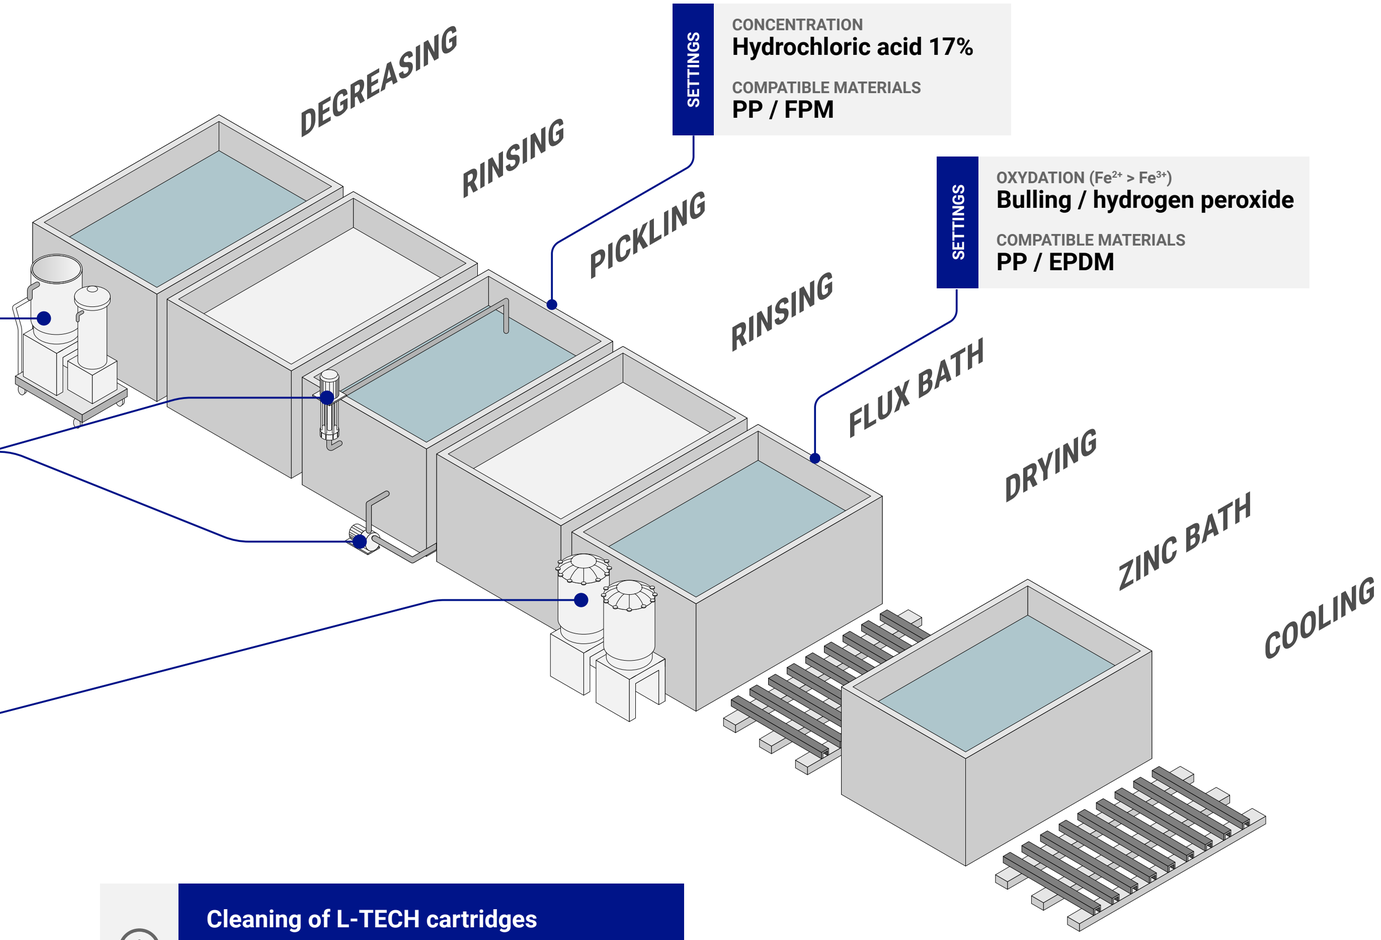

SETTINGS

CONCENTRATION
Hydrochloric acid 17%

COMPATIBLE MATERIALS
PP / FPM

SETTINGS

OXYDATION (Fe^{2+} > Fe^{3+})
Bulling / hydrogen peroxide

COMPATIBLE MATERIALS
PP / EPDM

COALESCER

Recovery of floating oils
Ideal for volumes from 1 to 100 l/day. The gravity technology allows a better dephasing.

MIXING PUMP *

Bath agitation (push-pull system)
Ensures bath homogenisation by pumping fluid on one side and rejecting it on the other side.

P FILTER + L-TECH

Extraction of iron particles
High capacity filter with 50 µm L-TECH pleated cartridges, to replace every 4 to 6 months.

Cleaning of L-TECH cartridges
- First cleaning with water jet.
- Dipping in used pickling bath.

⚠ : mechanical seals pump required

* vertical or horizontal pump

(+33) 4 76 26 12 09
contact@siebec.com
www.siebec.com